


INTENDED USE

The hinges are used for small, flat directional changes for LOE Ladders. They are also useful for creating T junctions.

INSTRUCTION FOR USE

Bend to suit the Cable Ladder and to the required angle. For TOE 55, bend outside and for TOE 75, bend inside. Assemble loosely with self locking bolts, adjust on side rails and tighten securely.

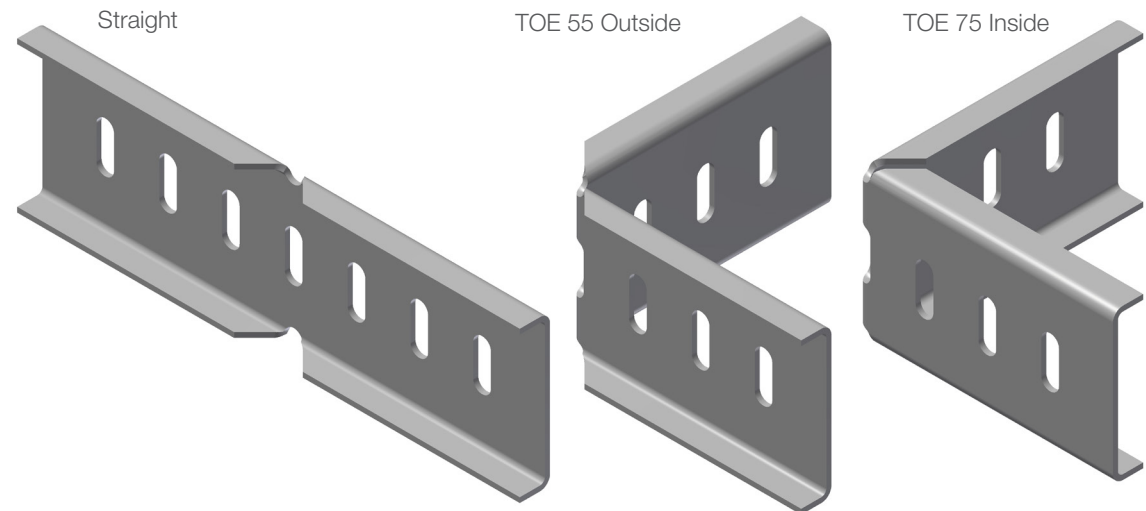

T-Formed by using Hinges on standard Ladders.



User Guide for Bolts:
Recommended Torque