

## INTENDED USE



Pipe Clamp to keep pipe in place. Allows for vertical adjustments due to slotted holes. Primarily to be used on CH100 and larger channels.

## INSTRUCTION FOR USE

Position the bottom part of the clamp with the perforated plate directly below the pipe.

Add at least two (4 bolts is preferred, depending on loads) M10 bolts in a cross pattern for optimal fastening. Adjust the plate as desired then tighten with nuts securely.

Add top part of pipe clamp to the pipe and secure tightly.

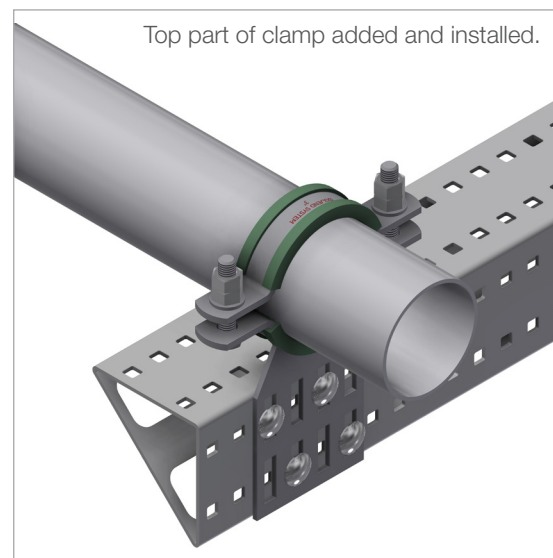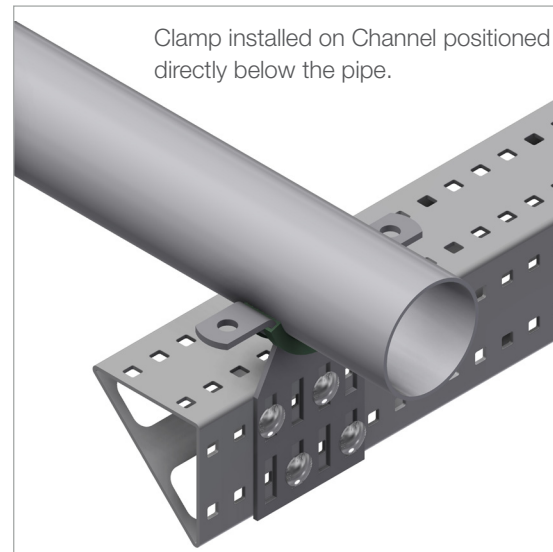

User Guide for Bolts:  
Recommended Torque