


INTENDED USE

Modular flexi riser with 4° increments for vertical changes in direction on both ends. Can be used as both inside and outside riser. Flexi riser available for all heights. The cables are supported throughout the transition.


INSTRUCTION FOR USE

Fix the angle by attaching the outer bolt in the corresponding holes on the flexi riser hinge. Adjust and tighten securely.

Can be used for inside and outside support.
Available for all SPB-RF heights.

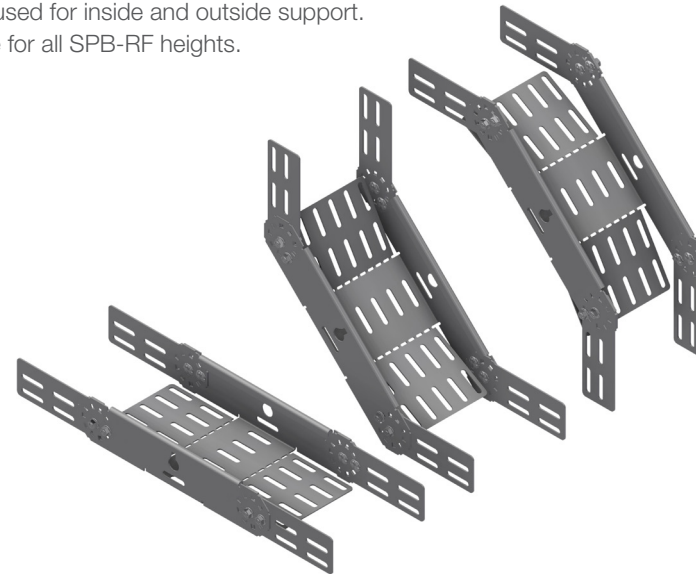

Single inside riser SPB-RF100.

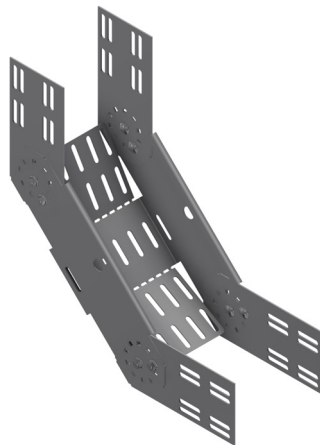


Risers can be connected for a greater radius.



SPB-RF50

The riser angle is adjustable in 4° increments by positioning the outer bolt in corresponding holes.

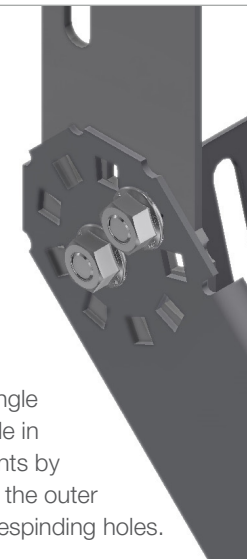

Single outside riser SPB-RF60.



User Guide for Bolts:
Recommended Torque