

INTENDED USE

OE Flat Elbows are single plane fixed radius bends, with splice connectors on one rail. Elbows with the same or different angles can easily be combined.




INSTRUCTION FOR USE

Fitting to a Ladder:

One External Splice piece is required on each side. Attach the splice with $\frac{3}{4}$ of the splice connector on the ladder, and $\frac{1}{4}$ on the fitting. Attach the Flat Elbow fitting to the ladder loosely using self locking bolts. Adjust all parts, and tighten securely.

Fitting to another fitting piece:

When fitting to another formed piece such as OE elbows, Tee-pieces or Cross-pieces, it is not necessary with extra splice connectors. Attach the parts together loosely using self locking bolts. Adjust all parts, and tighten securely.

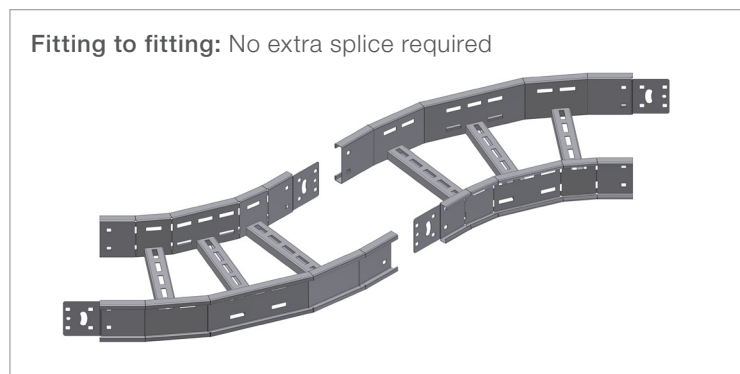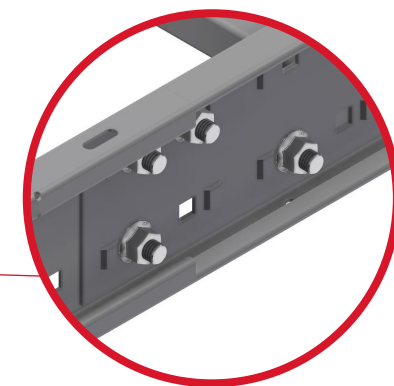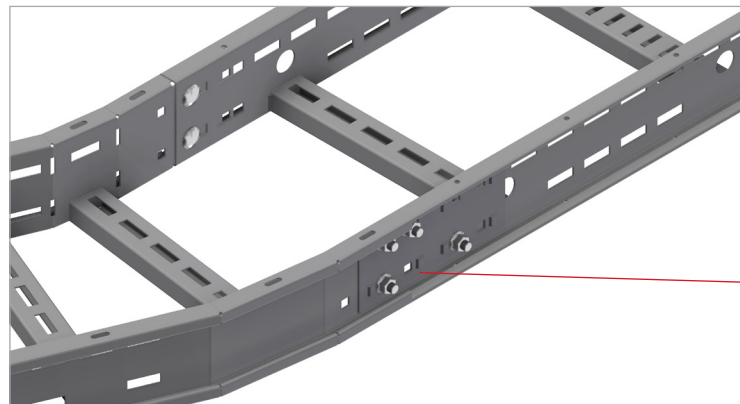

When attaching a Fitting to a Ladder: Turn the splice so the notches face outwards

Note - for connecting two flat elbows together with radius 300 mm, a 4 hole splice connector is required. See user guide ØI-RD-UG-EN-0294.



User Guide for Bolts:
Recommended Torque